


UNI 5738

| EN ISO 8765*

| DIN 960

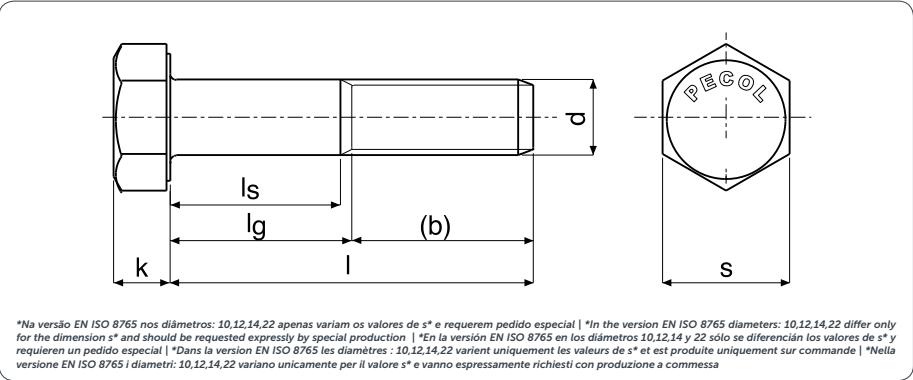

Parafuso cabeça sextavada rosca métrica parcial, passo fino

Hexagon bolt metric, fine pitch thread | Tornillo de cabeza hexagonal, rosca metrica fina parcial | Vis à tête hexagonale filetage métrique partiel, pas fin | Viti a testa esagonale con gambo parzialmente filettato passo fine

| D | M8 | M10 | M12 | M12 | M14 | M16 | M18 | M20 | M22 | M24 |
|-------------|---------------------------------------------|------|------|------|------|-----|------|------|-----|-----|
| P (1) | 1 | 1.25 | 1.25 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 2 |
| sDIN-UNI | 13 | 17 | 19 | 19 | 22 | 24 | 27 | 30 | 32 | 36 |
| s* EN ISO | - | 16 | 18 | 18 | 21 | - | - | - | 34 | - |
| K | 5.3 | 6.4 | 7.5 | 7.5 | 8.8 | 10 | 11.5 | 12.5 | 14 | 15 |
| b ≤ 125 | 22 | 26 | 30 | 30 | 34 | 38 | 42 | 46 | 50 | 54 |
| 125< b ≤200 | 28 | 32 | 36 | 36 | 40 | 44 | 48 | 52 | 56 | 60 |
| ls min. | ls min. = lg max. - 5 x p | | | | | | | | | |
| lg. max | Lg max. = L - b | | | | | | | | | |
| l (mm) | peso/ weight/ peso/ poids/ peso - 1000pc/Kg | | | | | | | | | |
| 30 | 17.1 | | | | | | | | | |
| 35 | 19.1 | | | | | | | | | |
| 40 | 21.1 | 36.3 | | | | | | | | |
| 45 | 23.0 | 39.4 | 55.2 | 55.2 | | | | | | |
| 50 | 25.0 | 42.5 | 59.6 | 59.6 | 84.5 | | | | | |
| 55 | 27.0 | 45.5 | 64.0 | 64.0 | 90.1 | 119 | | | | |
| 60 | 28.9 | 48.6 | 68.4 | 68.4 | 95.7 | 127 | 169 | | | |
| 65 | 30.9 | 51.7 | 72.8 | 72.8 | 101 | 135 | 179 | 228 | | |
| 70 | 32.9 | 54.7 | 77.2 | 77.2 | 107 | 143 | 189 | 240 | 293 | |
| 75 | 34.8 | 57.8 | 81.6 | 81.6 | 112 | 151 | 199 | 253 | 308 | 382 |
| 80 | 36.8 | 60.9 | 86.0 | 86.0 | 118 | 159 | 209 | 265 | 323 | 410 |
| 85 | 38.8 | 63.9 | 90.4 | 90.4 | 123 | 167 | 219 | 277 | 338 | 428 |
| 90 | 40.7 | 68.0 | 94.8 | 94.8 | 129 | 175 | 229 | 290 | 353 | 445 |
| 95 | 42.7 | 71.1 | 99.2 | 99.2 | 134 | 183 | 239 | 302 | 368 | 463 |
| 100 | 44.7 | 74.2 | 104 | 104 | 140 | 191 | 249 | 314 | 383 | 481 |
| 110 | | 80.3 | 113 | 113 | 152 | 217 | 269 | 339 | 413 | 517 |
| 120 | | 86.4 | 122 | 122 | 164 | 233 | 289 | 363 | 443 | 552 |
| 130 | | 92.5 | 131 | 131 | 176 | 249 | 308 | 387 | 473 | 588 |
| 140 | | 98.6 | 140 | 140 | 188 | 265 | 328 | 412 | 502 | 623 |
| 150 | | 105 | 149 | 149 | 200 | 281 | 348 | 437 | 532 | 659 |

Outras medidas sob consulta | Other measures upon request | Otras medidas solo bajo encargo | Autres mesures sur demande | Altre misure a richiesta

P (1) passo de rosca | thread pitch | paso de rosca | pas filetage | passo del filetto